

Specification for Soft Magnetic Cores

Date:
May.2021

Customer:

page 1

Part NO:

NO 100704

Spec No:

H3002

REV.00

Core design: CMC cores

Bare Dimensions (in mm) :

OD×ID×Ht: 9,8×6,5×4,5

Finished Dimensions(in mm):

OD: 11,5 Max

ID: 4,6 Min

H t: 6,3 Max

Core Material:Nanocrystalline

Type of Finish: Plastic Casing

Rohs Directive

Rated Dimensions:

A_{Fe} : 0,06 cm²

L_{Fe} : 2,6 cm

M_{Fe} : 1 g

Characteristics:

1 Setting values: 10KHz,5,4mA N=1

Specified valu 19,2 μH ≤AL≤ 37,1 μH

2 Setting values: 100KHz,5,4mA N=1

Specified valu 4,9 μH ≤AL≤ 9,4 μH

Testing device: Tonghui TH2826A LCR Meter

Nanocrystalline material :1K107B


Saturation flux density $B_s \geq 1,25T$

Permeability level μ : 93600 @10KHz

Operation Temperature range: -40°C~+150°C

Final inspection: 100% tested AQL:1,5 GB2828II

Comments: Rohs compliant

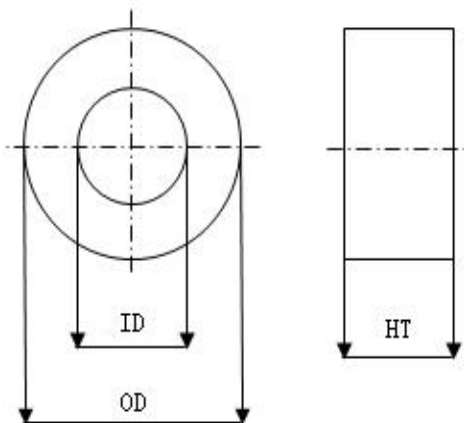

Change records

| PS Index | PS Revision | Content | Reason | Date | Changing | Approval |
|-------------|-------------|-----------|-----------------|----------|-------------|----------|
| 01 | 00 | AS Spec. | Initial Release | 2021.5.6 | HaiYan Ding | Hanson |
| | | | | | | |
| | | | | | | |
| DRAWN | | CHECKED | RECHECKED | APPROVED | | |
| HaiYan Ding | | LiJun Sun | David | Hanson | | |