

## Specification for Soft Magnetic Cores

Date:  
May.2021

Customer:

page 1

Part NO:

NO 16013030

Spec No:

H3061

REV.00

**Core design: CMC cores**

**Bare Dimensions (in mm) :**

OD×ID×Ht: 160×130×30

**Finished Dimensions(in mm):**

OD: 165 Max

ID: 125 Min

H t: 33,5 Max

**Core Material:Nanocrystalline**

**Type of Finish:** Epoxy Coating

**Rohs Directive**

**Rated Dimensions:**

$A_{Fe}$ : 3,38 cm<sup>2</sup>

$L_{Fe}$ : 45,5 cm

$M_{Fe}$ : 1106,4 g

**Characteristics:**

1 Setting values: 10KHz,0,3V N=1

Specified valu 63  $\mu H \leq AL \leq 117,6 \mu H$

2 Setting values: 100KHz,0,3V N=1

Specified valu 11,4  $\mu H \leq AL \leq 22,2 \mu H$

Testing device: Tonghui TH2826A LCR Meter

Nanocrystalline material :1K107B


Saturation flux density  $B_s \geq 1,25T$

Permeability level  $\mu$ : 90200 @10KHz

Operation Temperature range: -40°C~+150°C

Final inspection: 100% tested AQL:1,5 GB2828II

Comments: Rohs compliant

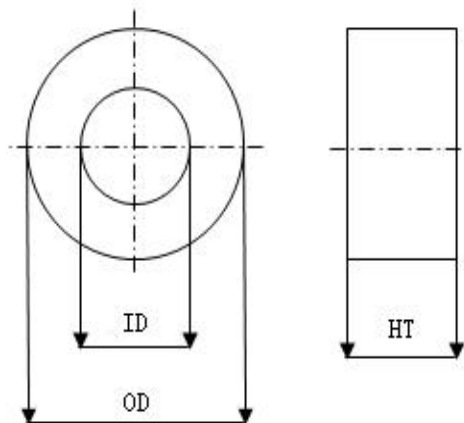

Change records

PS Index	PS Revision	Content	Reason	Date	Changing	Approval
01	00	AS Spec.	Initial Release	2021.5.6	HaiYan Ding	Hanson
DRAWN		CHECKED	RECHECKED	APPROVED		
HaiYan Ding		LiJun Sun	David	Hanson		